



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL

PTHP12G130A

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 208/230V/60

Cooling

Capacity	Btu/h	11800/12000
Input	W	1110/1130
Rated current	A	5.0/5.4
EER	Btu/w	10.6/10.6

Heating

Capacity	Btu/h	10200/10400
Rated Input (elect. Heater)	Kw	880/895
Rated current	A	12/13.2
Max. Current	A	NA

Compressor Electrical

Model	44X2623KTFJMZ	
Type	ROTARY	
Brand	RECHI	
Capacitor	mF	30
Refrigerant type	oz	R32/21.5

Air flow & Noise level

Indoor air flow	CFM	412/471
Indoor noise level	dB(A)	46/52
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model	YDK-25-4	
Input	W	70
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	900/1150

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A



Outdoor Coil Seacoast Coating

Outdoor Fan Motor

Model	YDK-AI-55-4P2	
Input	W	104
Speed	RPM	1600

Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	106.92/117.95

System Data

Design pressure	232/493 PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

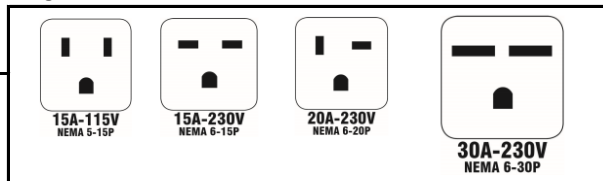

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535